



Features

- Reliable Half-Duplex (HDX) Low Frequency (LF) Communications Format
- 64 Bits For Data / Identification Storage
- 134.2 kHz Operating Frequency
- FSK Modulation
- Energy Harvesting Battery-Free Wireless Power
- 16 Bit CRC Error Detection Code Generator
- 10 Year Data Retention

Applications

- Inventory Management
- Ingress/Egress Discovery
- Real-time Container Tracking
- Manufacturing Production Flow Control
- Vehicle Identification
- Security Access Administration
- High Value Asset Monitoring

Description


The NCD1015ZP is a passive 50mm cylindrical low frequency half-duplex read-only radio frequency identification (RFID) transponder that operates at a resonant frequency of 134.2kHz. With 64-bits of pre-programmed identification data storage and a 16-bit CRC error checking code generator, the transponder supports ISO 11784 and ISO 11785 standards.

Using the power acquired from harvesting the RF energy transmitted by the RFID reader, the passive transponder responds by sending out a 128-bit packet that contains the stored 64-bit data, a 16-bit CRC-CCITT error checking code, and the overhead bits necessary to ensure transmission recognition. Transmission of the digital data from the transponder to the reader utilizes an FSK modulation technique where a logic 0 is represented by a 16 cycle burst of 134.2 kHz while a logic 1 uses 124.2 kHz.

Ordering Information

Part #	Description
NCD1015ZP	50mm HDX RFID 64-bit Data Transponder, Pre-programmed Identification Code Bit 1 = 0 :: Non-animal Bits 2 - 16 = 0x0000 Bits 17 - 26 = 0x3D2 (978 _d) Bits 27 - 64 :: Unique Identification Code - value will be incremented at the factory to provide a unique code for each device. Maximum number of unique values = $2^{38} - 1 = 0x3FFFFFFF$ (ID Code = 0 not used)
NCD1015ZPC	50mm HDX RFID 64-bit Data Transponder, Custom programmed Identification Code: Contact the factory.

Block Diagram

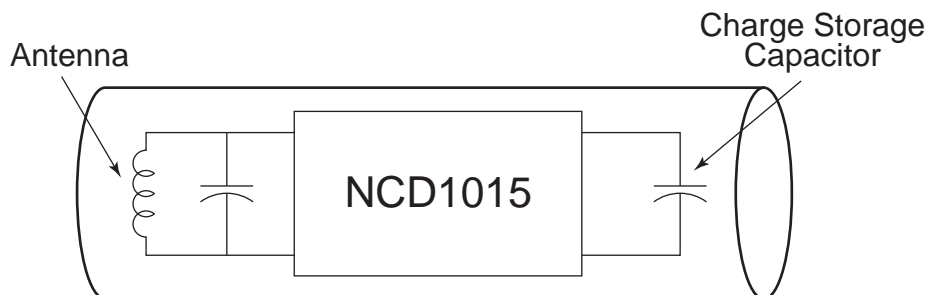

1. Specifications	3
1.1 Operating Conditions	3
1.2 Electrical Specifications	3
2. Functional Overview and Description	4
2.1 Overview	4
2.2 Power Transfer	4
2.3 Communication Interface - Tag to Reader	4
2.3.1 Data Bit Structure	4
2.3.2 Transponder Data Rate and Data Coding	4
2.3.3 Completion of Transmission	4
2.4 Transmission Protocol	5
2.4.1 Transponder - Response Data Format	5
2.4.2 CRC - CCITT Error Checking	5
3. Mechanical Data	6
3.1 Dimensions and Material	6
3.2 Water Resistance	6
3.3 Mechanical Shock	6
3.4 Thermal Stress	6

1. Specifications

1.1 Operating Conditions

Parameter	Minimum	Maximum	Unit
Operating Temperature, T_A	-20	+60	°C
Storage temperature, T_{STG}	-40	+60	°C

1.2 Electrical Specifications

Unless otherwise specified, minimum and maximum values are guaranteed by production testing or design. Typical values are characteristic of the device at 25°C, and are the result of engineering evaluations. They are provided for informational purposes only and are not guaranteed by production testing.

Parameter	Conditions	Symbol	Minimum	Typical	Maximum	Unit
Charging duration required for transmission			15	50	-	ms
Low Bit Frequency	$T_A = 25^\circ\text{C}$	f_0	133.6	134.2	134.8	kHz
	$-20^\circ\text{C} \leq T_A \leq 60^\circ\text{C}$		132.2	-	136.2	
High Bit Frequency	$T_A = 25^\circ\text{C}$	f_1	123.3	124.2	125.8	kHz
	$-20^\circ\text{C} \leq T_A \leq 60^\circ\text{C}$		122.0	-	126.5	
Data Retention			10	-	-	Years

2.4 Transmission Protocol

2.4.1 Transponder - Response Data Format

An RFID answer by the NCD1015ZP contains a Header, the identification DATA, a CRC value, and a Trailer.

Framed as shown below in Figure 3 the transmitted signal has a fixed length of 128 bits. The Header consists of a 16-bit Pre-Bits leader followed by an 8-bit Start byte. Following the CRC error checking value is the Trailer consisting of an 8-bit Stop byte followed by the 16-bit Post.

Depending on the value of the sixteenth Data bit, logical data address [48], the Stop byte value changes. When the identification data stored in the NCD1050ZP complies with ISO 11784, data bit 16 as defined in ISO 11784 will be 0 and the Stop byte value will be 0x7E. For identification data not compliant with ISO 11784 the Stop byte value will be determined by the value stored in the sixteenth bit of the data.

The Data, CRC, Stop and Post data will be transmitted starting with the LSB and ending with the MSB.

Figure 3: Tag Response Frame Format

Pre-Bits		Start		Data		CRC		Stop		Post	
1	16	17	24	25	88	89 (LSB)	104	105	112	113	128

All signals are coded [MSB:LSB].

- Pre-Bits [15:0] . . . = 0x0000
- Start Byte [7:0] . . = 0x7E
- Data [63:0] = Data
- CRC [15:0] = Data CRC
- Stop Byte [7:0] . . = 0x7E - Data bit 16 = 0[‡]
- Stop Byte [7:0] . . = 0x1E - Data bit 16 = 1[‡]
- Post Bits [15:0] . . = 0x0000

[‡] Data bit position as defined in ISO 11784

2.4.2 CRC - CCITT Error Checking

The CRC generator circuitry creates a 16 bit CRC to ensure the integrity of the data packets received by the transponder. The reader and transponder use the CRC-CCITT (Consultative Committee for International Telegraph and Telephone) algorithm for error detection.


The 16-bit cyclic redundancy code is calculated using the following polynomial:

$$P(X) = x^{16} + x^{12} + x^5 + x^0$$

The implemented version of the CRC check has the following characteristics:

- Reverse CRC-CCITT 16 as described in ISO/IEC 13239 and used in ISO/IEC 11784/11785.
- The CRC 16-bit shift register is initialized to all zeros (0x0000).
- The incoming data bits are XOR-ed with the MSB of the CRC register and is shifted into the register's LSB.
- After all data bits have been processed, the CRC register contains the CRC-16 code.
- Reversibility - The original data, together with associated CRC, when fed back into the same CRC generator will regenerate the initial value (all zero's).

Figure 4: Schematic Diagram of the 16-Bit CRC-CCITT Generator

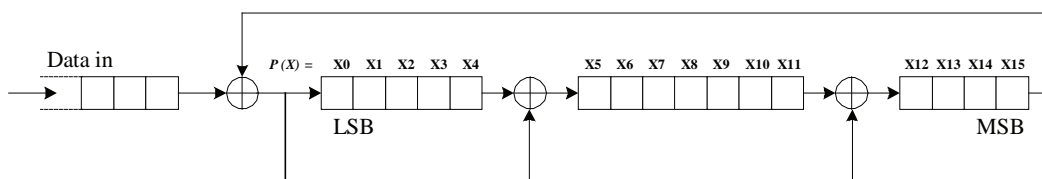

3. Mechanical Data

3.1 Dimensions and Material

Parameter	Min	Typ	Max	Unit
Length	51.8	52.3	52.8	mm
Diameter	16.5	17	17.5	mm
Case Material	PA66GF and epoxy			

3.2 Water Resistance

Water IP67. No frequency shift after 1 hour at 20°C under 1 meter of water.

3.3 Mechanical Shock

Drop test (qualified by similarity) 10 times at 30cm (both orientations)

3.4 Thermal Stress

Temperature cycling: 500 times 70°C ⇒ -25°C ⇒ 70°C.

Transition time: 30 minutes

Dwell time at 70°C: 60 minutes)

Dwell time at -25°C: 60 minutes).

For additional information please visit www.ixysic.com

IXYS Integrated Circuits Division makes no representations or warranties with respect to the accuracy or completeness of the contents of this publication and reserves the right to make changes to specifications and product descriptions at any time without notice. Neither circuit patent licenses nor indemnity are expressed or implied. Except as set forth in IXYS Integrated Circuits Division's Standard Terms and Conditions of Sale, IXYS Integrated Circuits Division assumes no liability whatsoever, and disclaims any express or implied warranty, relating to its products including, but not limited to, the implied warranty of merchantability, fitness for a particular purpose, or infringement of any intellectual property right.

The products described in this document are not designed, intended, authorized or warranted for use as components in systems intended for surgical implant into the body, or in other applications intended to support or sustain life, or where malfunction of IXYS Integrated Circuits Division's product may result in direct physical harm, injury, or death to a person or severe property or environmental damage. IXYS Integrated Circuits Division reserves the right to discontinue or make changes to its products at any time without notice.

Specifications: DS-NCD1015ZP-R02
© Copyright 2015, IXYS Integrated Circuits Division
All rights reserved. Printed in USA.
12/18/2015