
Amulet Capacitive 4.3”
GEMmodule™

MK-CY-043

Data Sheet

Preliminary

Introduction:

The MK-CY-043 is a 4.3” fully integrated, production ready color module with smartphone-like features. Using Cypress TrueTouch® technology, this capacitive touch panel supports multi-touch gestures and is easily programmed using GEMstudio™ software. A cover glass up to 6mm thick can be added to customize virtually any application. Featuring the Amulet GEM Graphical OS Chip™, the module supports a variety of embedded control interface applications and supports graphic formats including GIF, JPEG and PNG up to 24-bit color, plus 8-bit alpha (transparency channel).

Features:

- 480x272 TFT LCD module with projected capacitive touch (Cypress TrueTouch® Controller)
- Amulet GEM Graphical OS Chip™ with Royalty-free Graphical Operating System™
- Quick and flexible GUI design with GEMstudio™ software development tool
- On-Board Memory - 32megabit serial flash for storing GUI pages
- Backlight – White LED can be controlled via the touch panel or serial command
- Color Supported- up to 24 bit plus 8 bit alpha channel
- Graphics Supported Include- GIF, JPEG, PNG, BMP, and more
- Supports Unicode - Foreign language character sets
- Touch panel supports multitouch gestures
- Customizable cover glass up to 6mm thick to support virtually any application

General Specifications

ITEM	STANDARD VALUE	UNIT
Pixels (Resolution)	480 x 272	dots
Outline Dimension	111(H) x 78.4 (V) x17D	mm
Active rea	95.04(H) x 53.856(V)	mm
Dot Pitch	0.198 x 0.198	mm
Luminance	350 Typ.	Cd/m2
Operation Temp.	70 - 20	C
View Direction	6 o'clock	
Display Mode	TN / Transmissive / Normally White	
Backlight	10 White LED	
Backlight Control	PWM	
Data Flash	32 Megabit	
Interface	USB / RS232 / UART	

Electrical Characteristics

Recommended Operating Conditions

5V	5V Recommended
5V Current	300mA Min

DC Characteristics

V core Supply Current	22mA @1.2V
V input Low Level	-0.3 to 0.8V
V input High Level	2V to (Vcc + 0.3V)
Pull Up Resistors	70K to 175KOhms
IO Output Current	8mA
Static Current Excluding Power on Reset V core = 1.2V	600uA
Static Current Logic cells consumption, including Power on Reset and all input drivers V core = 1.2V	30uA

Pin Descriptions

Pin Type

I = Input

O = Output

P = Power Supply

Pin #	Signal	Type	Description
1	5V	P	5V @ 300mA
2	5V	P	5V @ 300mA
3	GND	P	Ground
4	GND	P	Ground
5	SCL	O	Serial Clock
6	SDA	O	Serial Data
7	COMMU RXD	I	CommU RXD UART
8	COMMU TXD	O	CommU TXD UART
9	PWM 1	O	Programmable Clock 1
10	PWM 2	O	Programmable Clock 2
11	Prog M	I	Program Mode - Float = Prog / GND = Run Note:1
12	PWM 0	O	Programmable Clock 0
13	RS232 TXD	O	TXD from RS232 Transceiver
14	T_CAL	I	Touch Panel Cal. - Float = Cal / GND = Normal Note:1
15	PROGU RXD	I	PROGU RXD UART
16	PROGU TXD	O	PROGU TXD UART
17	SPI C3	O	SPI Chip Select 3
18	RS232 RXD	I	RXD from RS232 Transceiver
19	SPI C2	O	SPI Chip Select 2
20	no connection		
21	MISO	O	SPI DATA In
22	SCLK	O	SPI Clock
23	RESET	O	System Reset by driving pin low
24	MOSI	O	SPI DATA Out

Note:1 Internally pulled up. Only pull to ground

Table 1. Header J3 24pin, 2mm, Hirose DF-11-24DP-2DSA


Mating Connectors

Hirose DF11-24DS-2R26 Straight
 DF11-24DS-2C Right Angle
 DF11-24DS-2DSA Board

JST PHDR-24VS


J3 Wiring


Connecting Project via UART

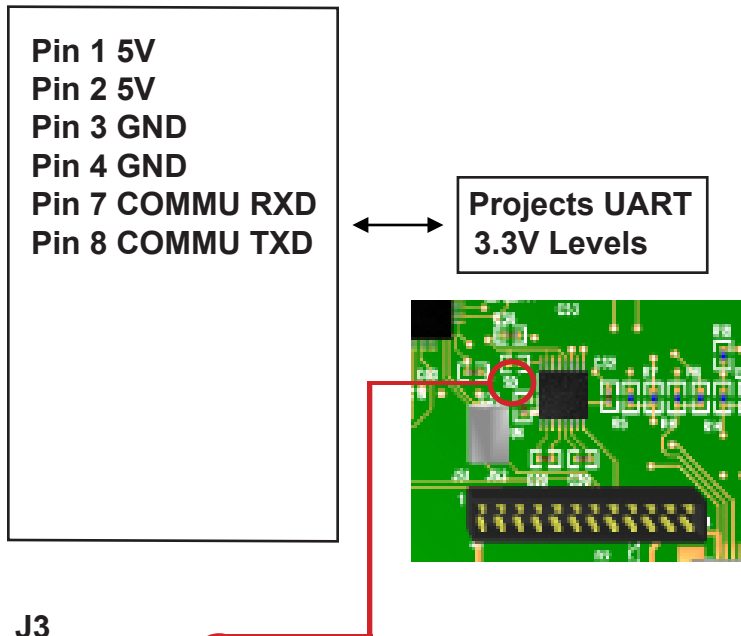

Note: Cut Trace across **SD** and Jumper "D" side to C38 "8" side GND to take the RS232 Transceiver out of circuit.

Connecting Project via RS232

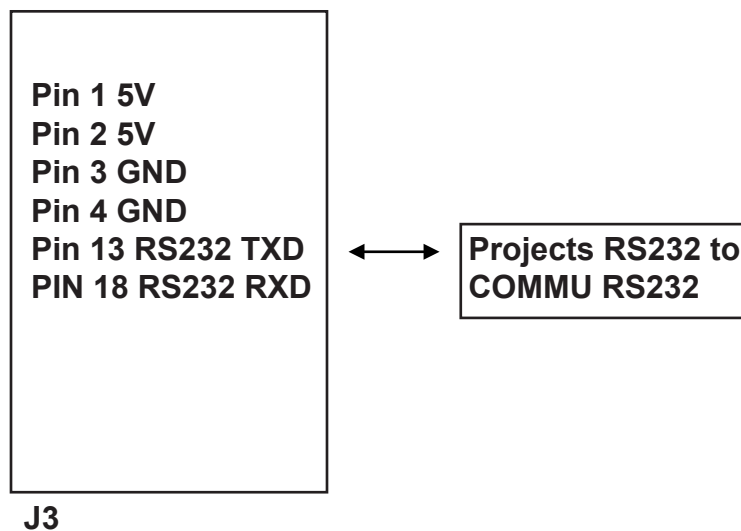

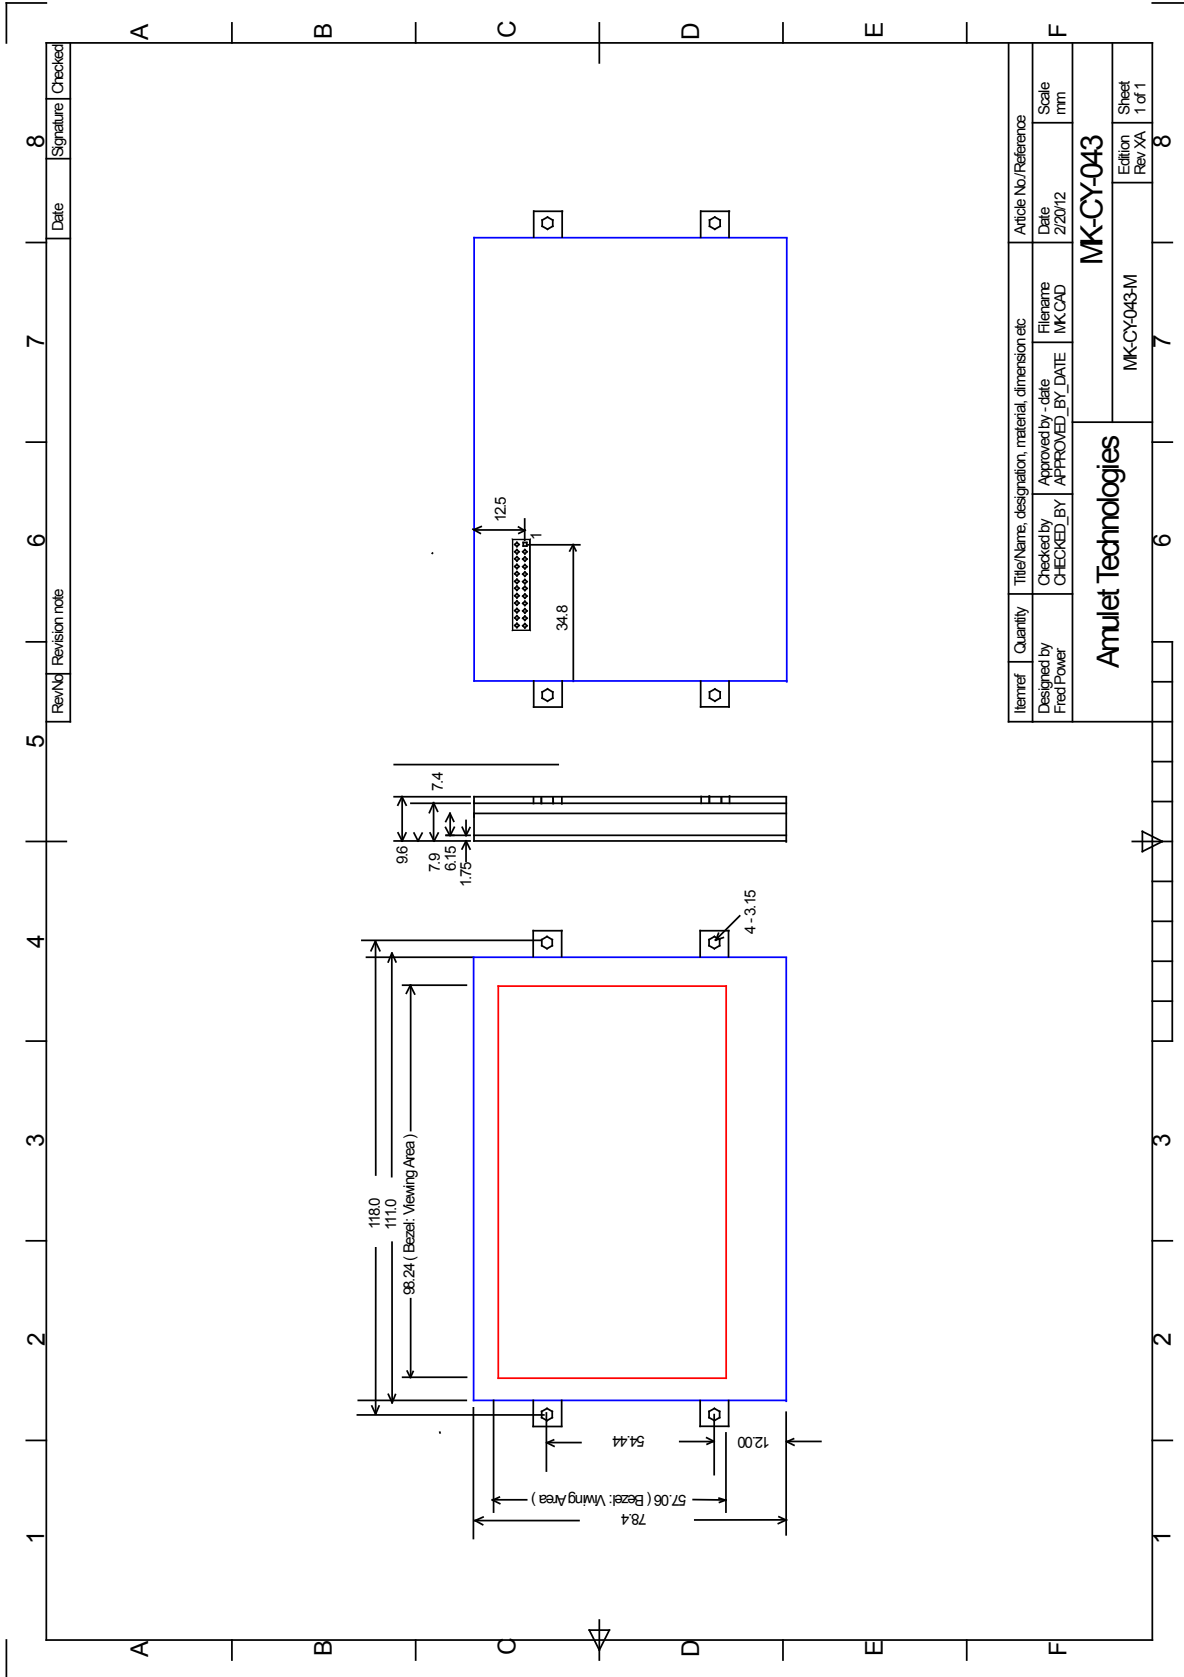

Rev/No	Revision note	Date	Signature	Checked
8				

Itemref	Quantity	Title/Name; designation; material; dimension etc.	Article No./Reference
Designed by Fred Power	Checked by APPROVED_BY	Approved by - date APPROVED_BY DATE	Date 2/2012
Amulet Technologies		File name MKCAD	Scale mm
MK-CY-043-M		Edition Rev XA	
8		Sheet 1 of 1	

Notes:

Communication and Program UARTs can be used for programming as well as for communication with the application's host processor.

If you wish to program via UART, make sure you can get to the Reset and the Program Mode pins. These will only be needed if a serious programming issue occurs.

To switch the module into Program Mode, reset must be applied after the DIP switch has been toggled.



Tel (408) 374-4956
Fax (408) 374-4941
<http://www.AmuletTechnologies.com>
Sales@AmuletTechnologies.com
Support@AmuletTechnologies.com
1475 S. Bascom Ave., Suite 111
Campbell, CA 95008 USA

Disclaimer: The information in this document is provided in connection with Amulet Technologies, LLC (Amulet) products. No license, express or implied, to any intellectual property right is granted by this document or in connection with the sale of Amulet products. EXCEPT AS SET FORTH IN AMULET'S TERMS AND CONDITIONS OF SALE WHERE AMULET IS THE SELLER, AMULET ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL AMULET BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS AND PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF AMULET HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. Amulet makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Amulet does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Amulet products are not approved for use in automotive applications, medical applications (including, but not limited to, life support systems and other medical equipment), avionics, nuclear applications, or other high-risk applications (e.g., applications that, if they fail, can be reasonably expected to result in significant personal injury or death).