

## EM2939 Series EuroMag Terminal Blocks

Hi-Current, 15.00 Centers

### SPECIFICATIONS

**Rating:** 115A, 600V with No Bottom Cover (NC) Option.

**Center Spacing:** 0.591" (15.00mm)

**Wire Range:** #2-20 AWG

**Housing Material:** UL rated 94V0 Thermoplastic

**Contact Material:** Tin-Plated Copper

**Cage Material:** Steel, Chromate-Plated

**Screw Size:** M5 Stainless Steel

**Operating Temperature:** 105°C (221°F) max., -40°C

(-40°F) min.

**Torque Rating:** 15 lb-in.

**Recommended PCB Hole Diameters:** 0.063" (1.60mm)

**Construction:** Mold to length

**Agency Information:** cULus File E62622; CE Certified




EM293908

Poles	L (mm)
2	30.0
3	45.0
4	60.0
5	75.0
6	90.0
7	105.0
8	120.0

To convert to inches, divide by 25.4

### Dimensions - mm

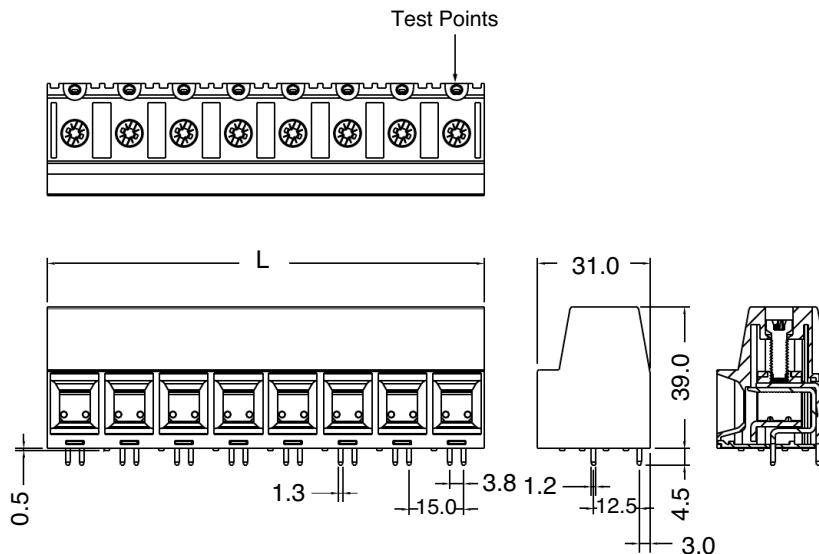

## Part Numbering System

Series

EM2939

# of Poles

□□

02 to 08