

Contact insert - VS-BU-LK-3,6/22,8/4,6 - 1688272

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



Power contacts, for D-SUB combination inserts, socket, solder cup, straight, rated current 40 A, gold-plated



Key commercial data

| | |
|------------------------|---|
| Packing unit | 1 |
| Minimum order quantity | 1 |
| Catalog page | Page 439 (PC-2011) |
| GTIN |  4 017918 179670 |
| Custom tariff number | 85369010 |
| Country of origin | GERMANY |

Technical data

Mechanical characteristics

| | |
|-------------------------------------|---|
| Insertion/withdrawal cycles | ≥ 500 |
| Connection method | Solder cup |
| Conductor cross section | 4 mm ² ... 6 mm ² |
| Connection cross section AWG | 10 ... 8 |
| Insertion force per signal contact | ≤ 7.00 N |
| Extraction force per signal contact | Approx. 5 N |
| Ambient temperature (operation) | -55 °C ... 155 °C |

Material data

| | |
|--------------------------|------------------------------|
| Contact material | Copper alloy |
| Contact surface material | Hard gold-plated over nickel |

Electrical characteristics

| | |
|-----------------------|--------|
| Rated current | 40 A |
| Insulation resistance | ≥ 5 GΩ |

Contact insert - VS-BU-LK-3,6/22,8/4,6 - 1688272

Classifications

eclass

| | |
|------------|----------|
| eCl@ss 4.0 | 27140816 |
| eCl@ss 4.1 | 27260701 |
| eCl@ss 5.0 | 27260701 |
| eCl@ss 5.1 | 27260701 |
| eCl@ss 6.0 | 27260705 |
| eCl@ss 7.0 | 27440309 |

etim

| | |
|----------|----------|
| ETIM 2.0 | EC000438 |
| ETIM 3.0 | EC000438 |
| ETIM 4.0 | EC000438 |
| ETIM 5.0 | EC000438 |

unspsc

| | |
|---------------|----------|
| UNSPSC 6.01 | 30211923 |
| UNSPSC 7.0901 | 39121522 |
| UNSPSC 11 | 39121522 |
| UNSPSC 12.01 | 39121522 |
| UNSPSC 13.2 | 39121522 |

Accessories

Accessories

Tools

Removal tool - HC-M4-KOAX-EWZ - 1676747




Contact removal tool for coaxial contacts

Drawings

Contact insert - VS-BU-LK-3,6/22,8/4,6 - 1688272

Dimensioned drawing

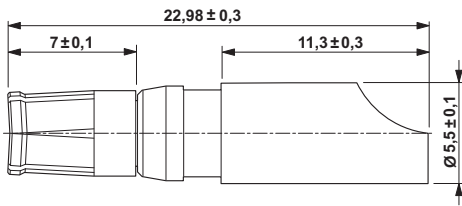

D-SUB power contact socket

© Phoenix Contact 2012 - all rights reserved
<http://www.phoenixcontact.com>