
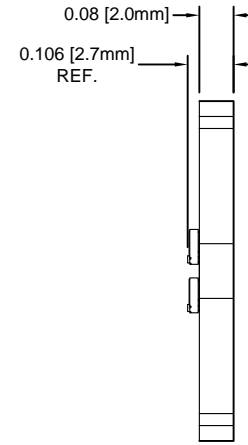


REV.	DESCRIPTION	DATE	APPROVED
F	Corrected Board Thickness	04/01/14	J. C.
G	Engineering Release	04/01/14	J. C.
H	Removed BOM	08/09/16	J. C.

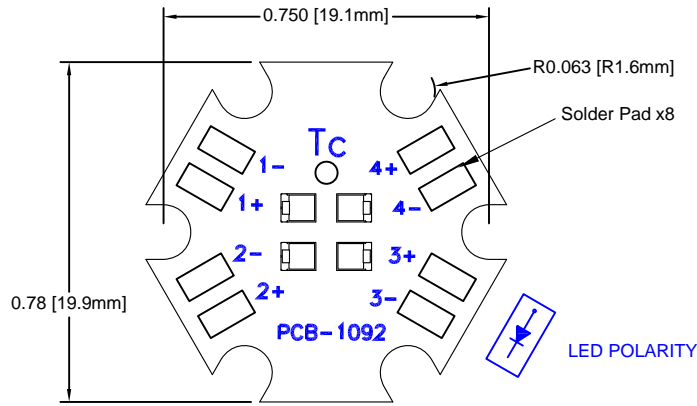

### ORDERING INFORMATION

## L24-ZESXXXXK4

CORRELATED COLOR TEMPERATURE  
IN KELVIN

Part Number	LED P/N	Color	CCT (K)	Typical Luminous Flux (lm)	Philips Lumileds P/N Reference
L24-ZES3000K4	BDL-1520	Warm White	3000	480	LXZ2-3090-5
L24-ZES5700K4	BDL-1523	Cool White	5700	800	LXZ2-5770

STANDARD TOLERANCE (UNLESS OTHERWISE SPECIFIED)		 4 THOMAS, IRVINE, CA. 92618 TEL: (949) 951-8808 FAX: (949) 951-3974			
DECIMALS	ANGULAR				
.X ± .1	X° ± 1°		TITLE: L24 Starboard Light Engine		
.XX ± .02			DESIGNED: <b>B. Oliver</b>	DATE: <b>11/07/13</b>	PART NO: <b>L24-ZESXXXXK4</b>
.XXX ± .010		CHECKED: <b>J. Chiang</b>	DATE: <b>11/07/13</b>	CAGE CODE : <b>32559</b>	SHEET # <b>1 OF 1</b>
CAD GENERATED DOCUMENT. DO NOT MEASURE DRAWING.					