

## MIRELLA-50-M-PIN

~30° medium beam


### TECHNICAL SPECIFICATIONS:

Dimensions	Ø 49.9 mm
Height	23.9 mm
Fastening	pin
Colour	metal
Box size	480 x 280 x 300 mm
Box weight	3.1 kg
Quantity in Box	336 pcs
ROHS compliant	yes ⓘ




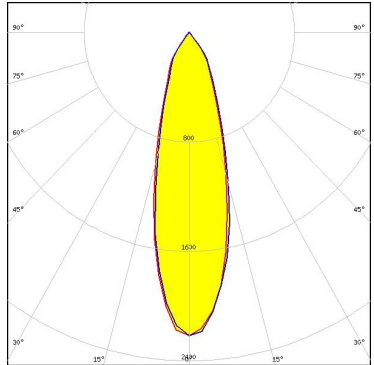
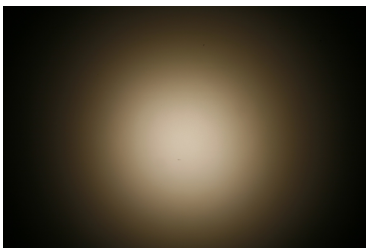
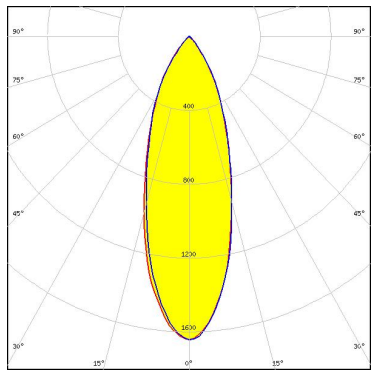

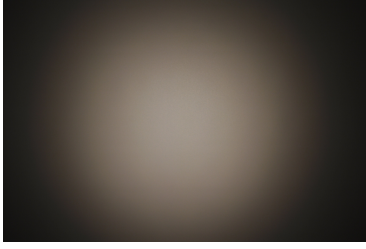
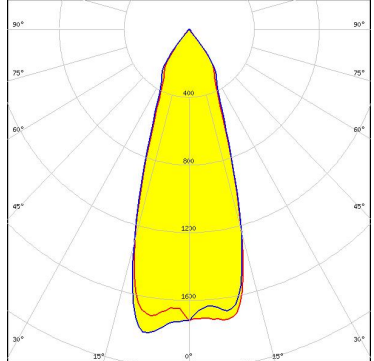
### MATERIAL SPECIFICATIONS:

Component	Type	Material	Colour	Coating
MIRELLA-50-M-PIN	Reflector	PC	metal	lacquer

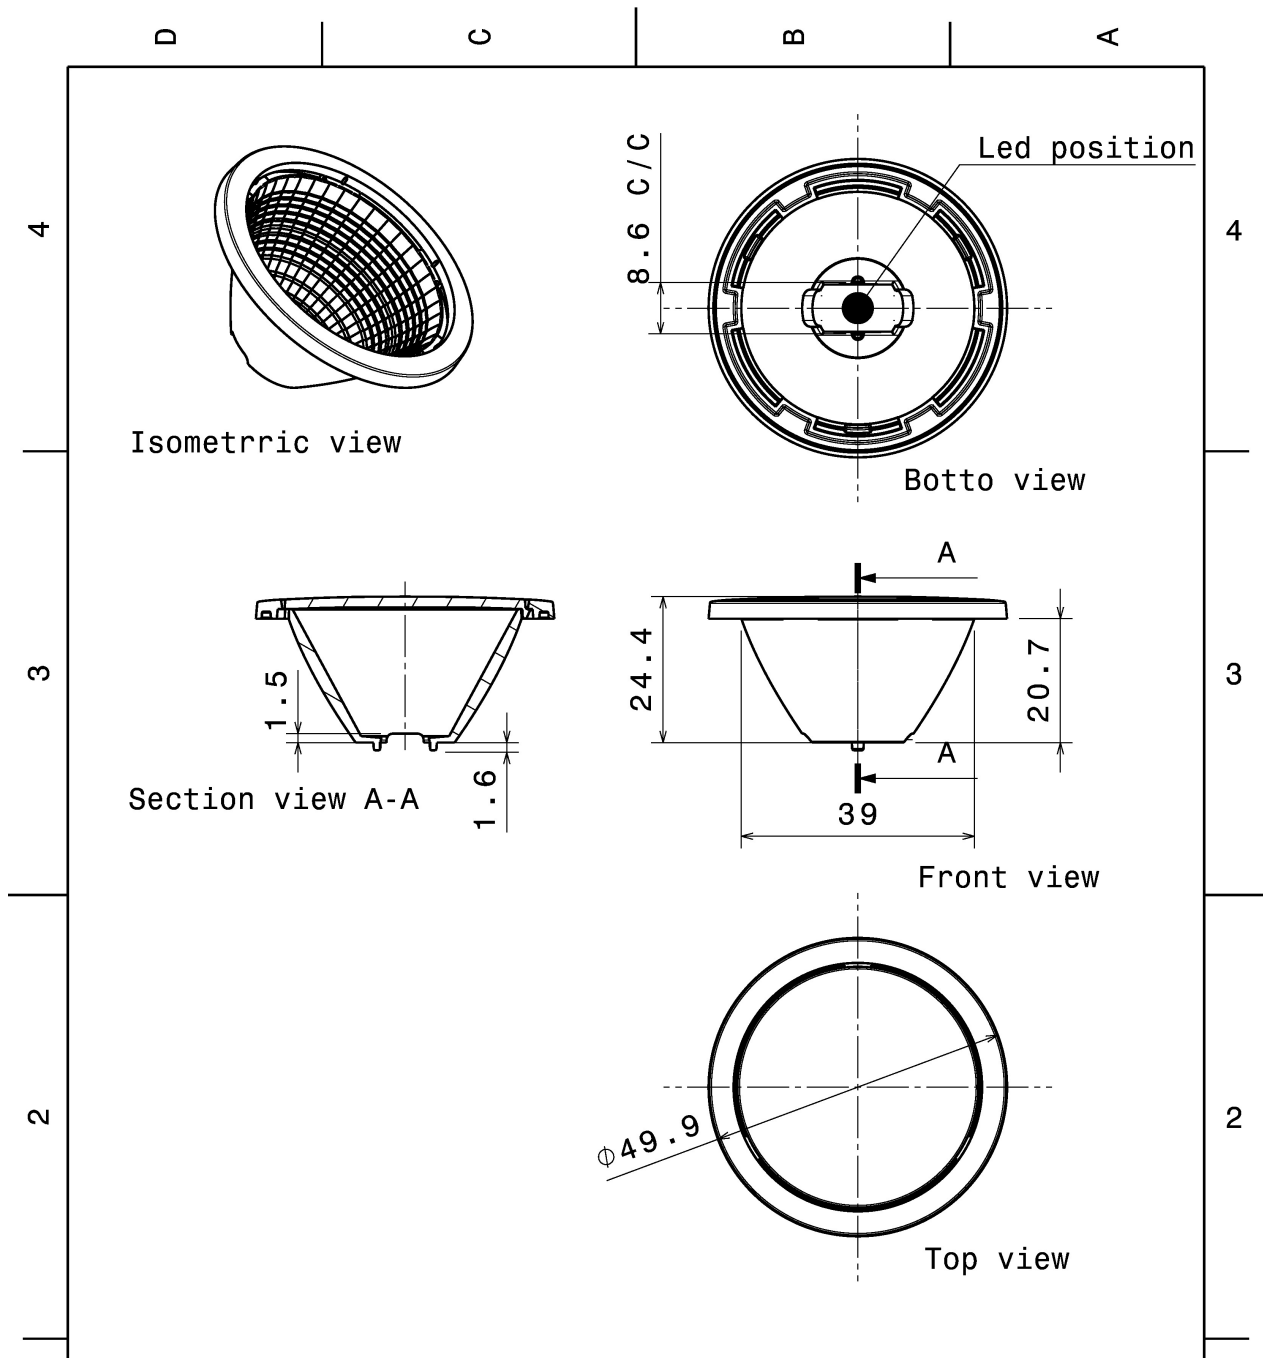

<p>Tolerances if not otherwise shown According to DIN ISO 2768-1 Linear measures: Up to 30mm class M, otherwise class C. According to DIN ISO 2768-2 Form and position: class L</p> <p>THIRD ANGLE PROJECTION: </p> <p>This drawing is the property of LEDiL Oy. It may not be reproduced, copied or communicated without a written agreement with LEDiL Oy."</p>	<b>LEDiL</b>		Ledil Oy Salorankatu 10 FIN 24240 SALO Finland	
	<b>DRAWING TITLE</b>			
	Datasheet_Mirella_pin			
	<b>SIZE</b>	<b>PART NUMBER</b>		
A4	-			
<b>SCALE</b>	1:1	<b>WEIGHT</b>	-	<b>SHEET</b> 1/1


#### PHOTOMETRIC DATA (MEASURED):

<p>bridgelux</p> <p>LED SM4</p> <p>FWHM 29.0°</p> <p>Efficiency 80 %</p> <p>Peak intensity 2.200 cd/lm</p> <p>Required components: C13333_MIRELLA-CL</p>		
<p>bridgelux</p> <p>LED SM4</p> <p>FWHM 35.0°</p> <p>Efficiency 78 %</p> <p>Peak intensity 1.650 cd/lm</p> <p>Required components: C12479_MIRELLA-DL</p>		
<p><b>CREE</b> ⇄</p> <p>LED MHB-A/B</p> <p>FWHM 28.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 2.530 cd/lm</p> <p>Required components:</p>		
<p><b>CREE</b> ⇄</p> <p>LED MHB-A/B</p> <p>FWHM 35.0°</p> <p>Efficiency 83 %</p> <p>Peak intensity 1.820 cd/lm</p> <p>Required components: C12479_MIRELLA-DL</p>		



**PHOTOMETRIC DATA (MEASURED):**





LED MHB-A/B  
FWHM 34.0°  
Efficiency 83 %  
Peak intensity 1.970 cd/lm  
Required components:  
C13333\_MIRELLA-CL

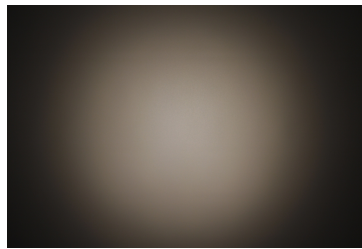



LED XHP50  
FWHM 32.0°  
Efficiency 85 %  
Peak intensity 1.900 cd/lm  
Required components:  
C13333\_MIRELLA-CL

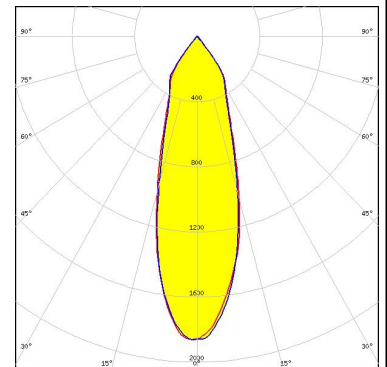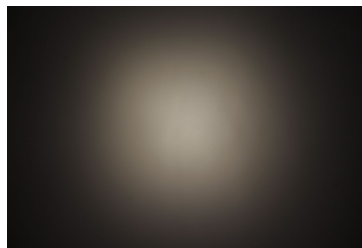

LED XHP50  
FWHM 37.0°  
Efficiency 83 %  
Peak intensity 1.400 cd/lm  
Required components:  
C13723\_MIRELLA-RZL

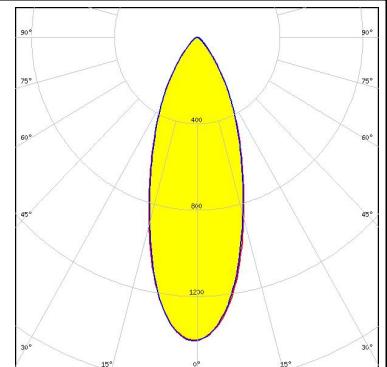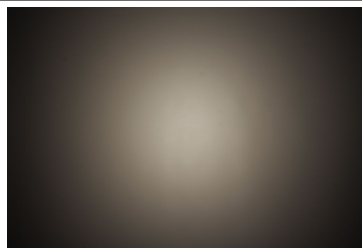

LED XHP50  
FWHM 25.0°  
Efficiency 90 %  
Peak intensity 2.500 cd/lm  
Required components:

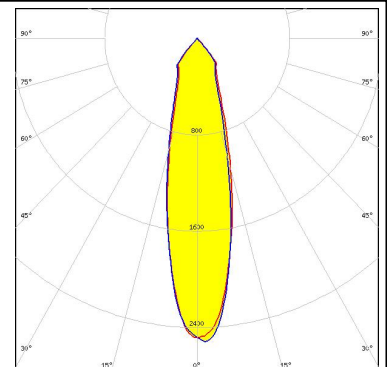
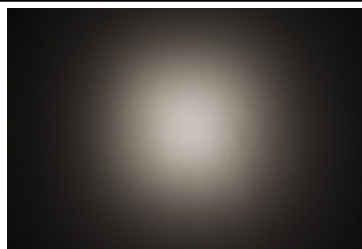






#### PHOTOMETRIC DATA (MEASURED):





LED XHP50  
 FWHM 32.0°  
 Efficiency 86 %  
 Peak intensity 1.800 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

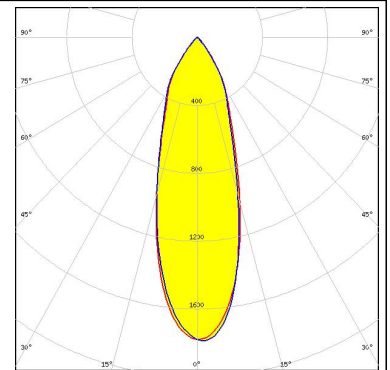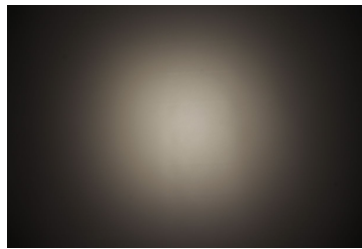



LED XM-L  
 FWHM 24.0°  
 Efficiency 89 %  
 Peak intensity 2.900 cd/lm  
 Required components:

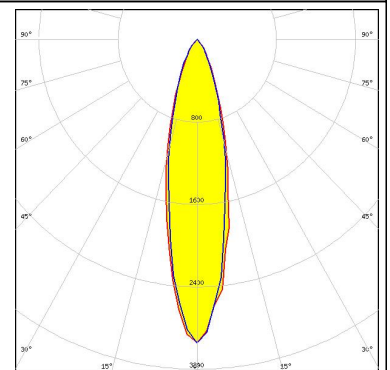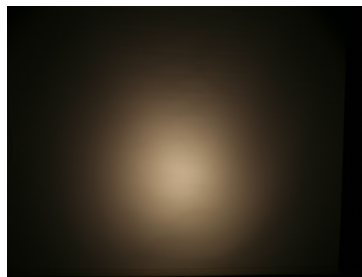

LED XM-L  
 FWHM 28.0°  
 Efficiency 84 %  
 Peak intensity 2.300 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

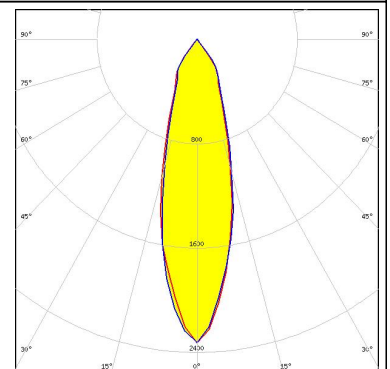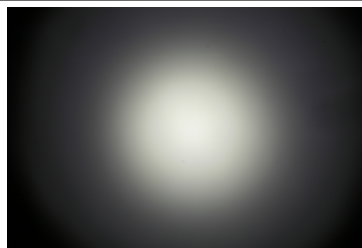



LED XM-L  
 FWHM 35.0°  
 Efficiency 80 %  
 Peak intensity 1.500 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

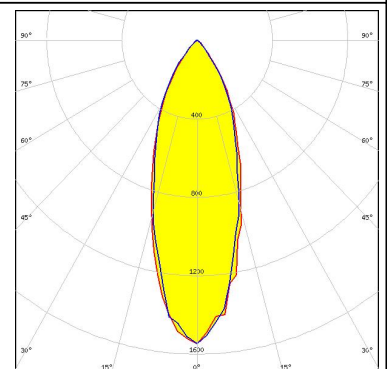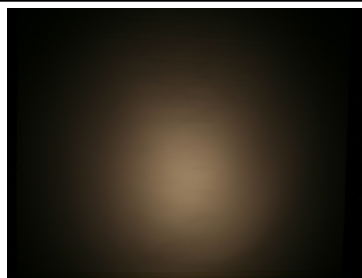



#### PHOTOMETRIC DATA (MEASURED):




LED XM-L RGB  
 FWHM 37.0°  
 Efficiency 83 %  
 Peak intensity 1.500 cd/lm  
 Required components:  
 C13723\_MIRELLA-RZL

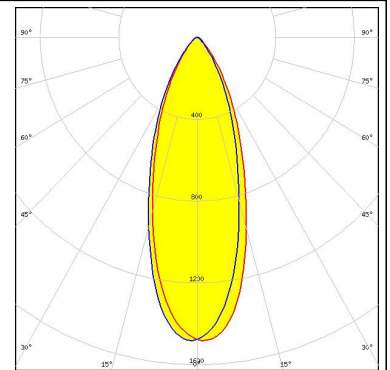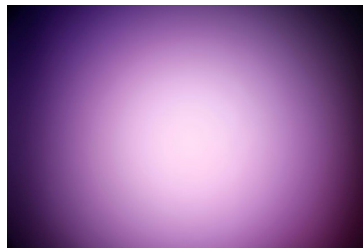



LED XM-L2  
 FWHM 33.0°  
 Efficiency 82 %  
 Peak intensity 1.900 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

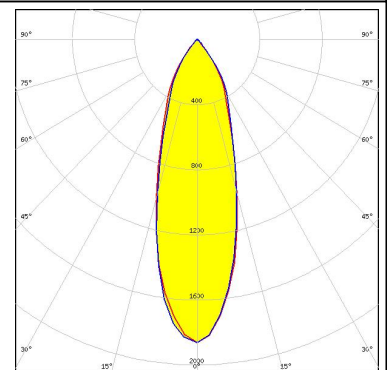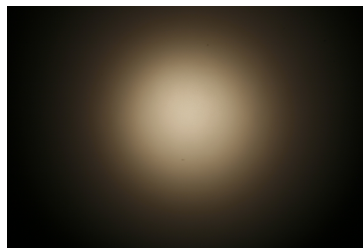

LED XM-L2  
 FWHM 22.0°  
 Efficiency 91 %  
 Peak intensity 3.100 cd/lm  
 Required components:

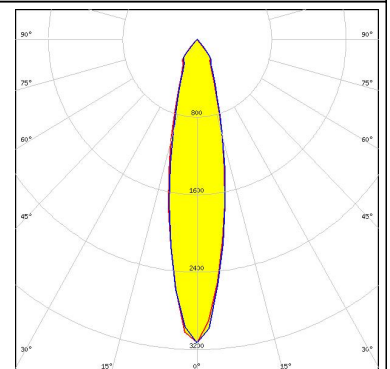


LED XP-G  
 FWHM 24.0°  
 Efficiency 83 %  
 Peak intensity 2.700 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

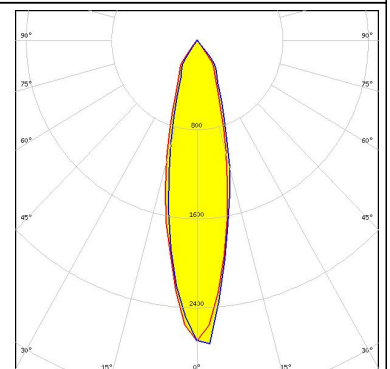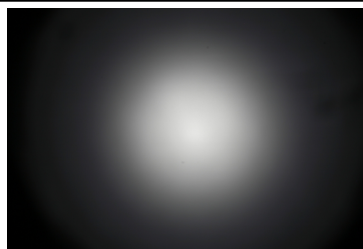



**PHOTOMETRIC DATA (MEASURED):**




LED XP-G  
FWHM 34.0°  
Efficiency 81 %  
Peak intensity 1.620 cd/lm  
Required components:  
C12479\_MIRELLA-DL

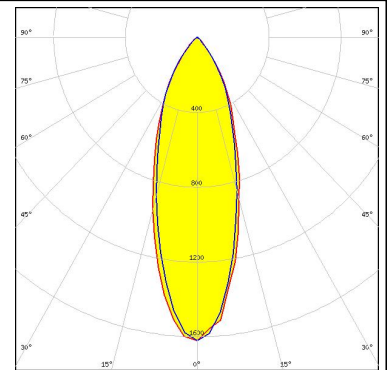

LED XP-G  
FWHM 24.0°  
Efficiency 86 %  
Peak intensity 3.300 cd/lm  
Required components:

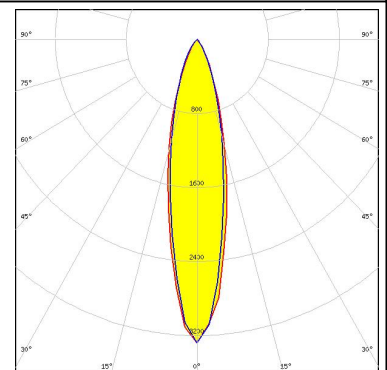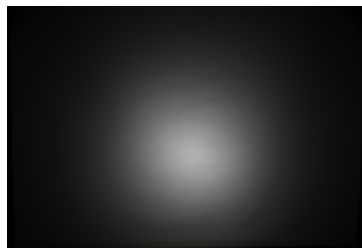

LED XP-G2  
FWHM 30.0°  
Efficiency 83 %  
Peak intensity 2.000 cd/lm  
Required components:  
C12479\_MIRELLA-DL

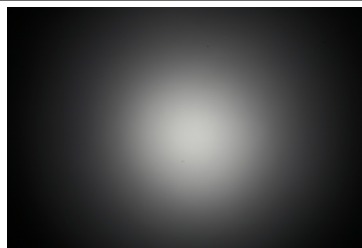


LED XP-G2  
FWHM 22.0°  
Efficiency 88 %  
Peak intensity 2.900 cd/lm  
Required components:




#### PHOTOMETRIC DATA (MEASURED):





LED XP-L HI  
 FWHM 17.0°  
 Efficiency 88 %  
 Peak intensity 4.500 cd/lm  
 Required components:

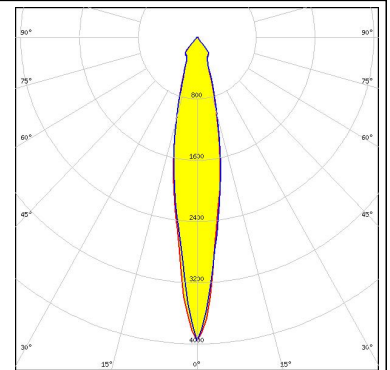



LED XT-E  
 FWHM 23.0°  
 Efficiency 85 %  
 Peak intensity 3.400 cd/lm  
 Required components:

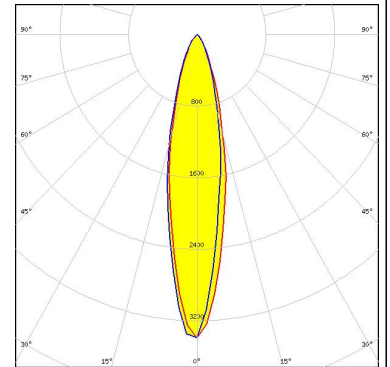

LED XT-E  
 FWHM 22.0°  
 Efficiency 81 %  
 Peak intensity 2.900 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

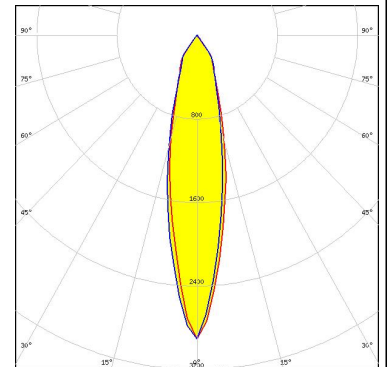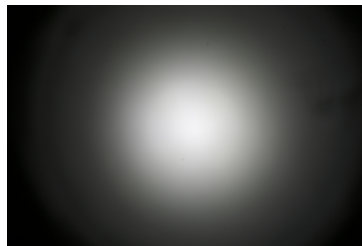


LED XT-E  
 FWHM 32.0°  
 Efficiency 78 %  
 Peak intensity 1.780 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

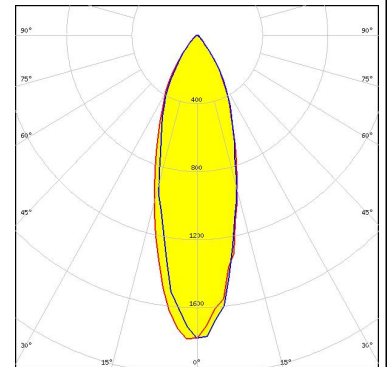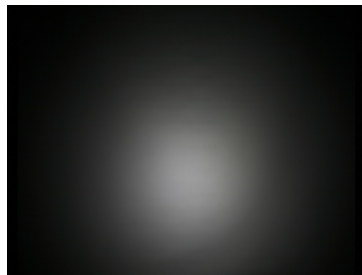

#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON 5050  
 FWHM 22.0°  
 Efficiency 90 %  
 Peak intensity 3.200 cd/lm  
 Required components:

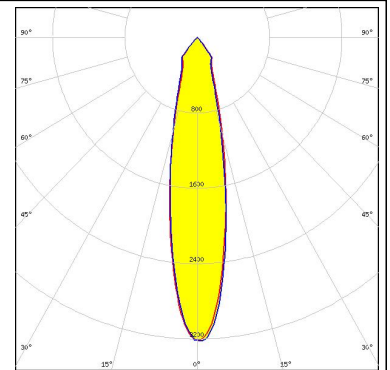



##### LUMILEDS

LED LUXEON A  
 FWHM 22.0°  
 Efficiency 87 %  
 Peak intensity 3.400 cd/lm  
 Required components:

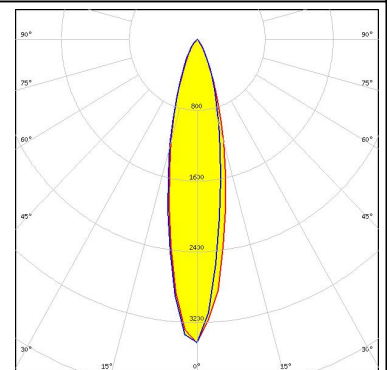



##### LUMILEDS

LED LUXEON A  
 FWHM 34.0°  
 Efficiency 80 %  
 Peak intensity 1.640 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

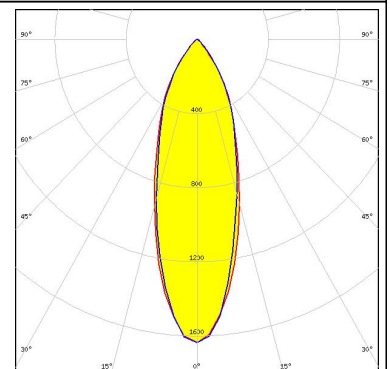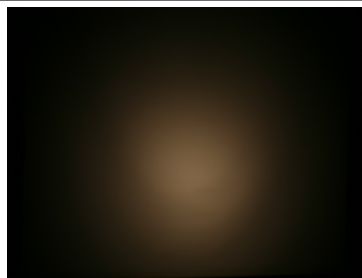

##### LUMILEDS

LED LUXEON A  
 FWHM 24.0°  
 Efficiency 84 %  
 Peak intensity 2.600 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

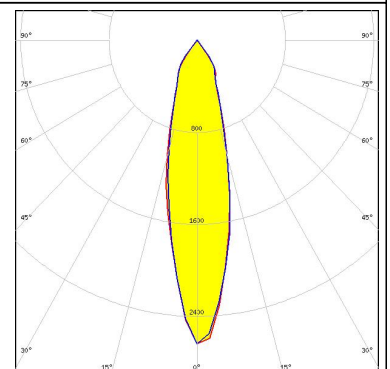
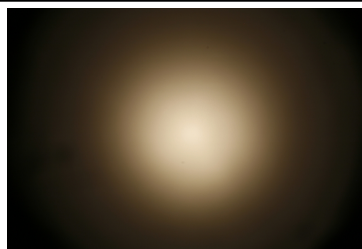




#### PHOTOMETRIC DATA (MEASURED):


##### LUMILEDS

LED LUXEON C RGBW  
 FWHM 39.0°  
 Efficiency 74 %  
 Peak intensity 1.220 cd/lm  
 Required components:  
 C13723\_MIRELLA-RZL

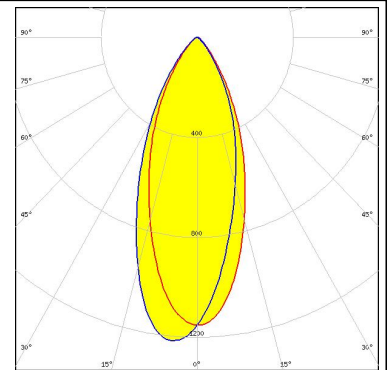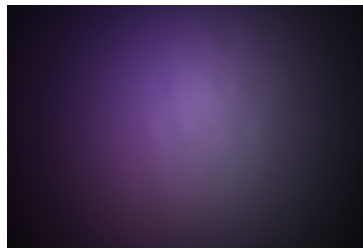



##### LUMILEDS

LED LUXEON M/MX  
 FWHM 24.0°  
 Efficiency 87 %  
 Peak intensity 2.630 cd/lm  
 Required components:

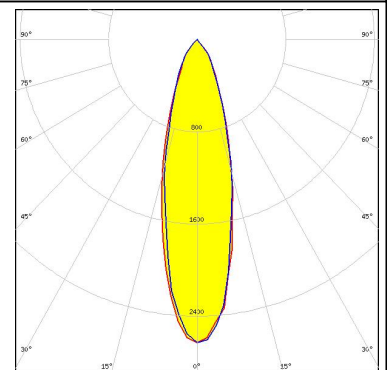


##### LUMILEDS

LED LUXEON M/MX  
 FWHM 38.0°  
 Efficiency 81 %  
 Peak intensity 1.500 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

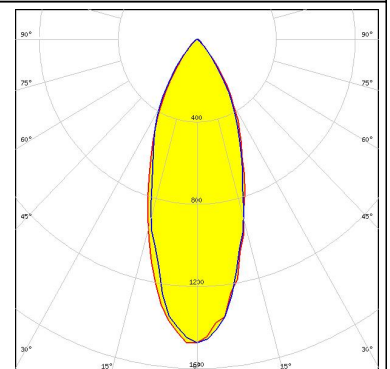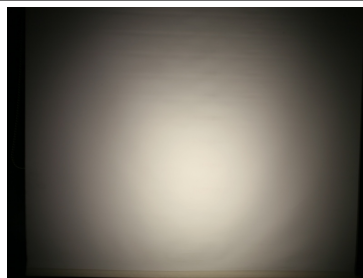

##### LUMILEDS

LED LUXEON M/MX  
 FWHM 33.0°  
 Efficiency 84 %  
 Peak intensity 2.000 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

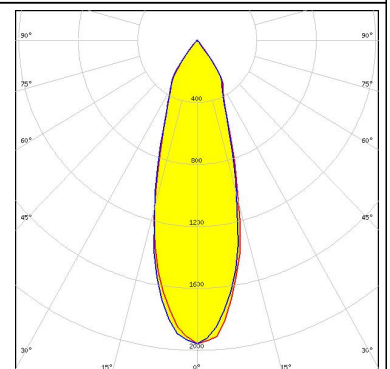




**PHOTOMETRIC DATA (MEASURED):**



**LUMILEDS**

LED LUXEON MZ  
FWHM 20.0°  
Efficiency 88 %  
Peak intensity 4.000 cd/lm  
Required components:

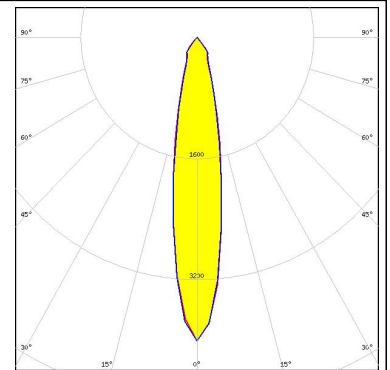



**LUMILEDS**

LED LUXEON MZ  
FWHM 27.0°  
Efficiency 84 %  
Peak intensity 2.400 cd/lm  
Required components:  
C12479\_MIRELLA-DL

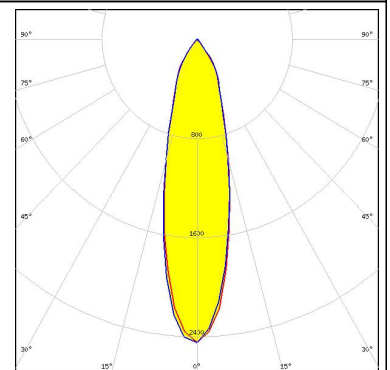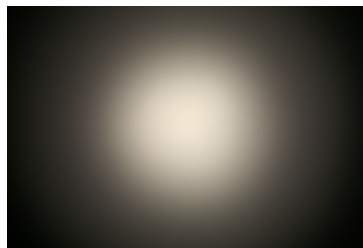



**LUMILEDS**

LED LUXEON Z RGB  
FWHM 31.0°  
Efficiency 83 %  
Peak intensity 1.700 cd/lm  
Required components:  
C13723\_MIRELLA-RZL

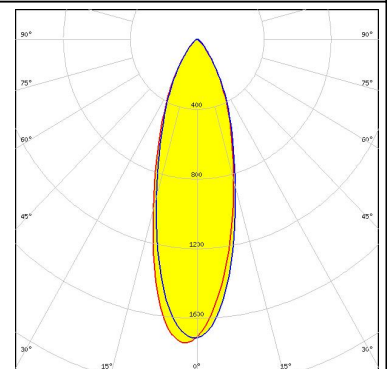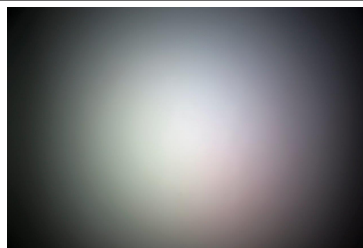

**NICHIA**


LED NS9x383  
FWHM 32.0°  
Efficiency 83 %  
Peak intensity 1.700 cd/lm  
Required components:  
C12479\_MIRELLA-DL

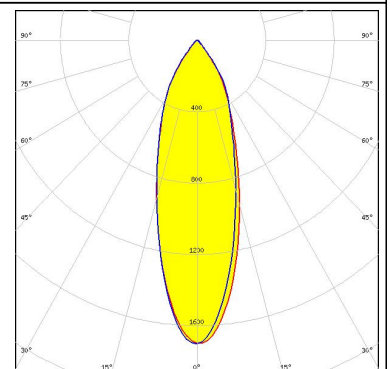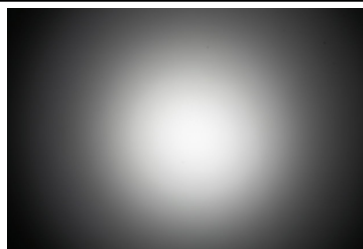



#### PHOTOMETRIC DATA (MEASURED):





LED NS9x383  
 FWHM 24.0°  
 Efficiency 88 %  
 Peak intensity 2.450 cd/lm  
 Required components:

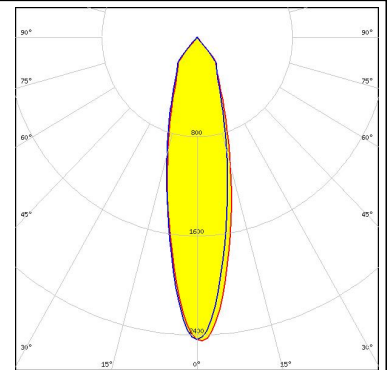


LED NV4x144A  
 FWHM 27.0°  
 Efficiency 89 %  
 Peak intensity 2.500 cd/lm  
 Required components:

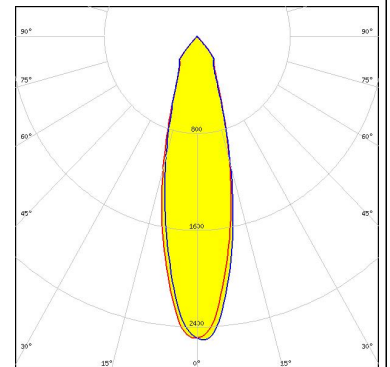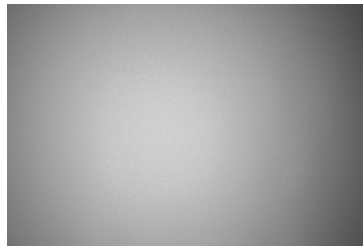

LED Duris S8  
 FWHM 28.0°  
 Efficiency 84 %  
 Peak intensity 2.200 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

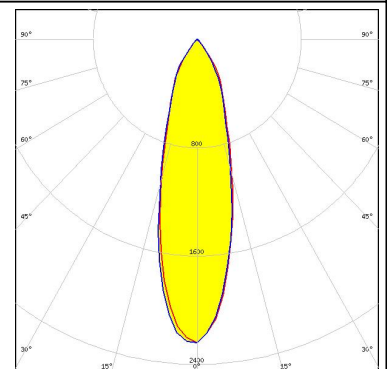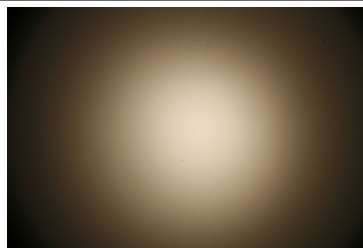


LED Duris S8  
 FWHM 22.0°  
 Efficiency 88 %  
 Peak intensity 3.200 cd/lm  
 Required components:

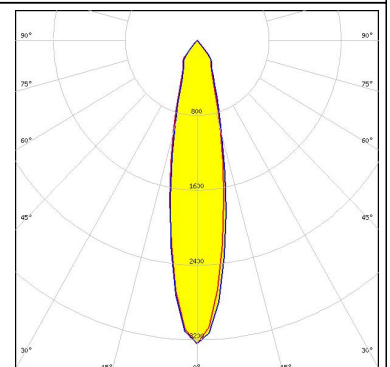

#### PHOTOMETRIC DATA (MEASURED):



**OSRAM**  
Opto Semiconductors

LED Duris S8  
FWHM 26.0°  
Efficiency 84 %  
Peak intensity 2.600 cd/lm  
Required components:  
C13333\_MIRELLA-CL

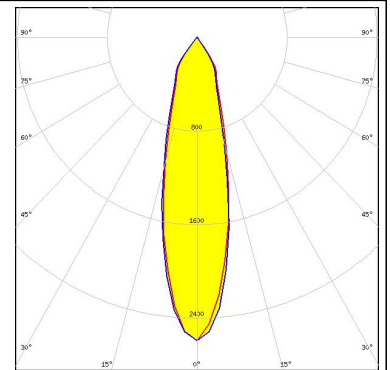


**OSRAM**  
Opto Semiconductors

LED Oslon Square EC  
FWHM 22.0°  
Efficiency 84 %  
Peak intensity 3.400 cd/lm  
Required components:

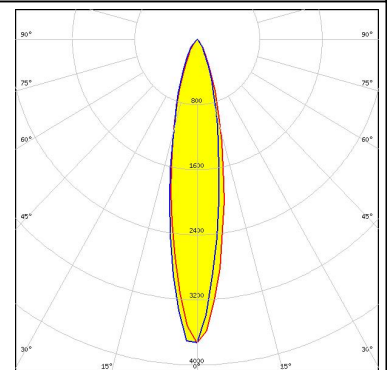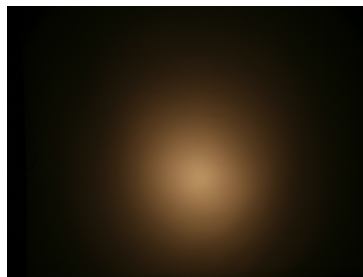



**OSRAM**  
Opto Semiconductors

LED Oslon Square EC  
FWHM 22.0°  
Efficiency 83 %  
Peak intensity 3.000 cd/lm  
Required components:  
C13333\_MIRELLA-CL





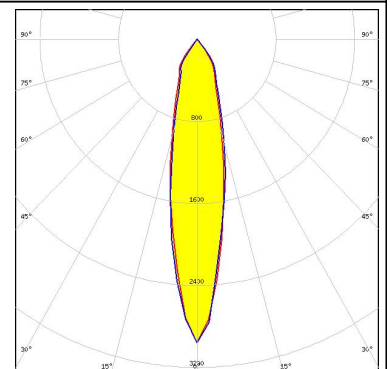


**OSRAM**  
Opto Semiconductors

LED Oslon Square EC  
FWHM 32.0°  
Efficiency 79 %  
Peak intensity 1.700 cd/lm  
Required components:  
C12479\_MIRELLA-DL

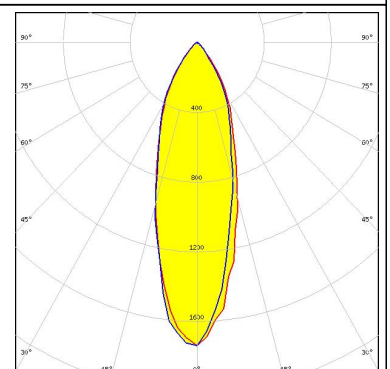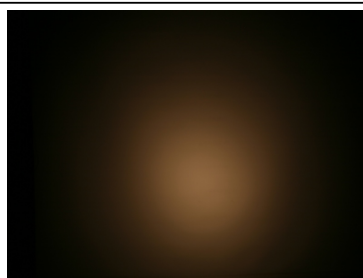


**PHOTOMETRIC DATA (MEASURED):**
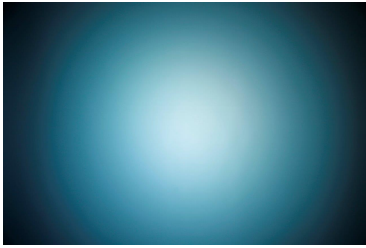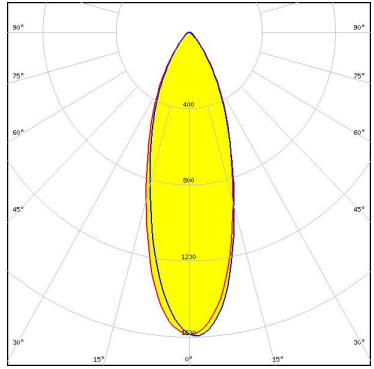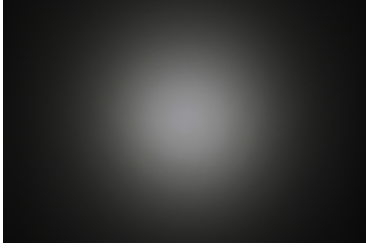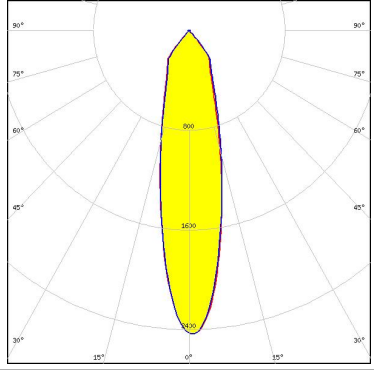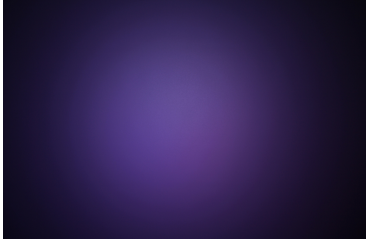
<p><b>OSRAM</b> Opto Semiconductors</p> <p>LED Ostar-SMT RGB FWHM 34.0° Efficiency 83 % Peak intensity 1.600 cd/lm Required components: C13723_MIRELLA-RZL</p>		
<p><b>SAMSUNG</b></p> <p>LED LH508A FWHM 24.0° Efficiency 88 % Peak intensity 2.400 cd/lm Required components:</p>		
<p><b>SEOL</b> SEOUL SEMICONDUCTOR</p> <p>LED F50360 (RGB) FWHM 33.0° Efficiency 82 % Peak intensity 1.810 cd/lm Required components: C13723_MIRELLA-RZL</p>		


#### PHOTOMETRIC DATA (SIMULATED):





LED XHP35 HD  
 FWHM 28.0°  
 Efficiency 92 %  
 Peak intensity 2.500 cd/lm  
 Required components:

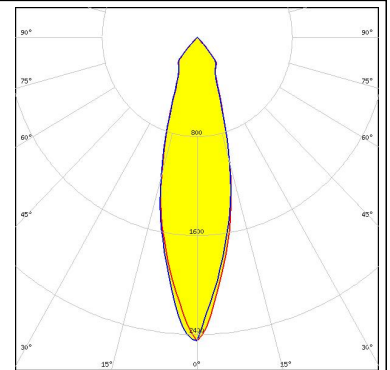



LED LUXEON 5258  
 FWHM 23.0°  
 Efficiency 91 %  
 Peak intensity 3.800 cd/lm  
 Required components:

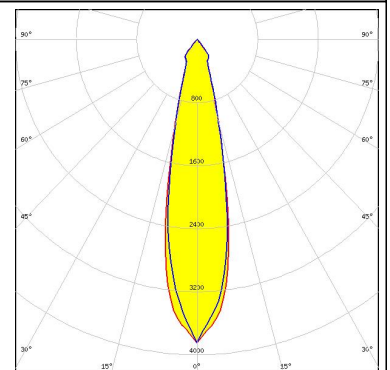

LED OSCONIQ P 7070  
 FWHM 31.0°  
 Efficiency 88 %  
 Peak intensity 2.360 cd/lm  
 Required components:  
 C12479\_MIRELLA-DL

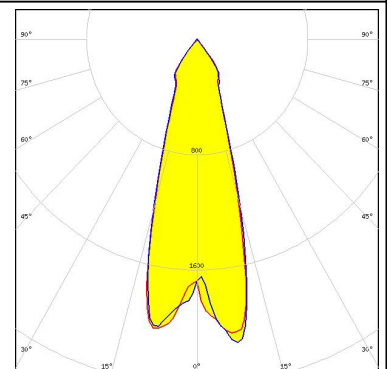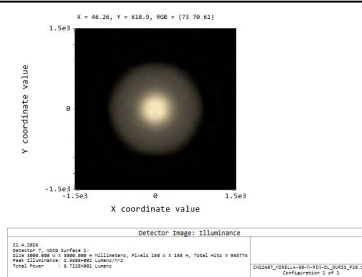



LED OSCONIQ P 7070  
 FWHM 29.0°  
 Efficiency 87 %  
 Peak intensity 2.310 cd/lm  
 Required components:  
 C13333\_MIRELLA-CL

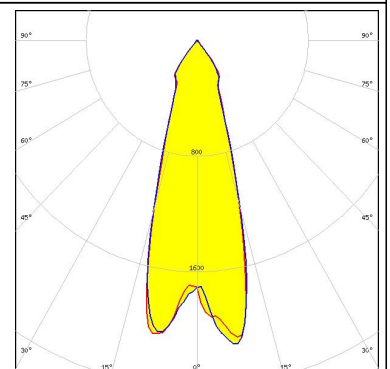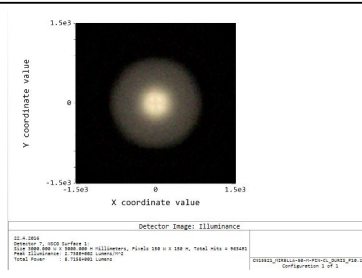

#### PHOTOMETRIC DATA (SIMULATED):


**OSRAM**  
Opto Semiconductors

LED                   OSCONIQ P 7070  
FWHM                26.0°  
Efficiency           91 %  
Peak intensity      2.890 cd/lm  
Required components:

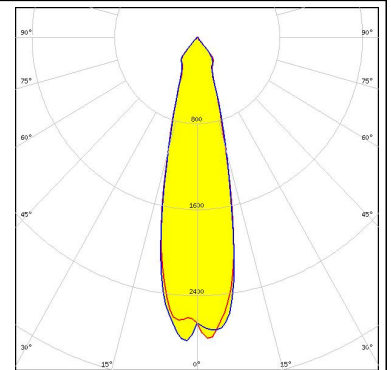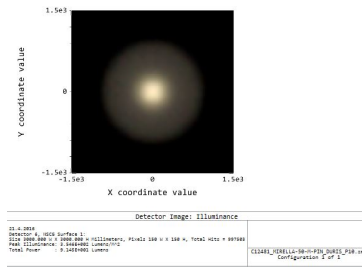

**SEOL**  
SEOUL SEMICONDUCTOR

LED                   Z8Y22P  
FWHM                19.0°  
Efficiency           89 %  
Peak intensity      4.320 cd/lm  
Required components:

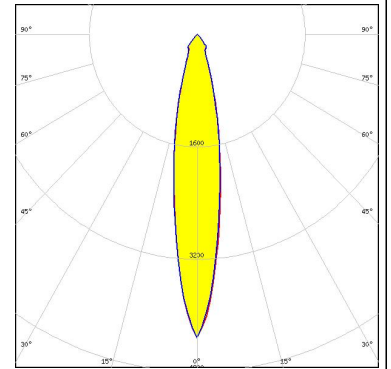



#### GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

#### MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

#### PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

#### LEDiL Oy

Joensuunkatu 13  
FI-24240 SALO  
Finland

#### LEDiL Inc.

228 West Page Street  
Suite D  
Sycamore IL 60178  
USA

#### Local sales and technical support

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)

#### Shipping locations

Salo, Finland  
Hong Kong, China

#### Distribution Partners

[www.ledil.com/  
where\\_to\\_buy](http://www.ledil.com/where_to_buy)