


THIS DRAWING IS A CONTROLLED DOCUMENT. DWG NO

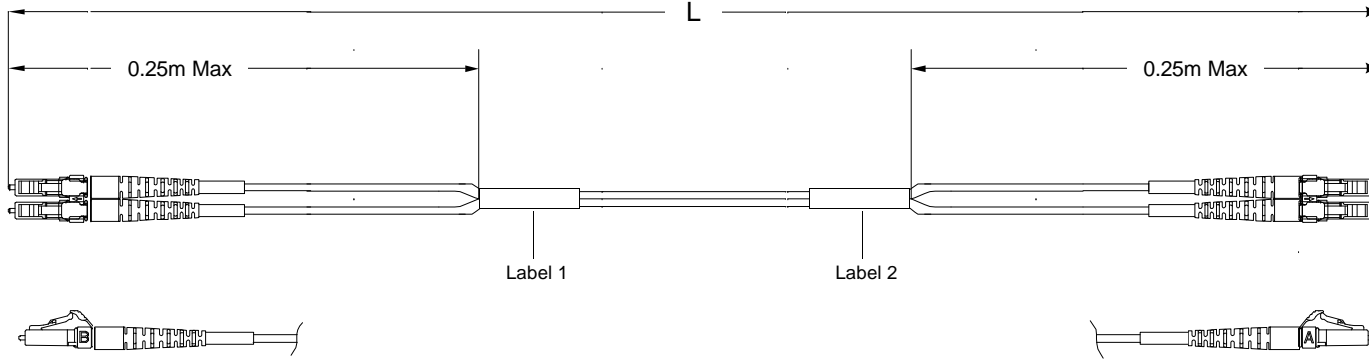

Left Side

Connector(s): LC-Duplex Secure
 Mode: MM
 Housing Color: Brown
 Geom. Spec: N/A

Fiber Path

A - _____ - B
 B - _____ - A

Right Side

Connector(s): LC-Duplex
 Mode: MM
 Housing Color: Beige
 Geom. Spec: N/A

Notes:

- 1 Product and Processing must meet requirements of Tyco Electronics Standard 230-702
- 2 Includes dust caps (not shown on print).
- 3 IL tested at 1300nm.
- 4 Label 2 will not be present on any cable assembly less than 5 meters long.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS TO BE USED ONLY BY THOSE EMPLOYEES OF TYCO ELECTRONICS CORPORATION WHO HAVE BEEN GRANTED ACCESS TO IT. IT IS TO BE KEPT CONFIDENTIAL AND NOT DISCLOSED TO ANY OTHER PERSONS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
 CE
 DIST
 16

REV	DATE	BY	CHKD	APPD	DESCRIPTION
A	7/9/2008	JD			Rev Per EC# RELEASE
P					LTR REVISION RECORD

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± . 1 PLC ± . 2 PLC ± . 3 PLC ± . 4 PLC ± .
-----------------------	---

Restricted To:

DWG	Cable Assy Configurator	MATERIAL	HEAT TREAT
CHK	Jeremy Duncan		
APVD	Jeremy Duncan	AMP Tyco Electronics, Inc. Harrisburg, PA 17105-3608	
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex		
SCALE	SIZE	DRAWING NO	SHEET
NTS	A2	C- 1906097	1 of 4
			REV
			A

USED ON

THIS DRAWING IS A CONTROLLED DOCUMENT. BFC#D

Part #	L (meters)	L (feet)	LC-Duplex Secure, Brown		LC-Duplex, Beige	
			IL (dB)	RL (dB)	IL (dB)	RL (dB)
4-1906097-3	42.570 - 43.430	139.66 - 142.48	0.56	-	0.56	-
4-1906097-4	43.560 - 44.440	142.91 - 145.80	0.57	-	0.57	-
4-1906097-5	44.550 - 45.450	146.16 - 149.11	0.57	-	0.57	-
4-1906097-6	45.540 - 46.460	149.40 - 152.42	0.57	-	0.57	-
4-1906097-7	46.530 - 47.470	152.65 - 155.74	0.57	-	0.57	-
4-1906097-8	47.520 - 48.480	155.90 - 159.05	0.57	-	0.57	-
4-1906097-9	48.510 - 49.490	159.15 - 162.36	0.57	-	0.57	-
5-1906097-0	49.500 - 50.500	162.40 - 165.68	0.58	-	0.58	-
5-1906097-1	50.490 - 51.510	165.64 - 168.99	0.58	-	0.58	-
5-1906097-2	51.480 - 52.520	168.89 - 172.30	0.58	-	0.58	-
5-1906097-3	52.470 - 53.530	172.14 - 175.62	0.58	-	0.58	-
5-1906097-4	53.460 - 54.540	175.39 - 178.93	0.58	-	0.58	-
5-1906097-5	54.450 - 55.550	178.64 - 182.25	0.58	-	0.58	-
5-1906097-6	55.440 - 56.560	181.88 - 185.56	0.58	-	0.58	-
5-1906097-7	56.430 - 57.570	185.13 - 188.87	0.59	-	0.59	-
5-1906097-8	57.420 - 58.580	188.38 - 192.19	0.59	-	0.59	-
5-1906097-9	58.410 - 59.590	191.63 - 195.50	0.59	-	0.59	-
6-1906097-0	59.400 - 60.600	194.88 - 198.81	0.59	-	0.59	-
6-1906097-1	60.390 - 61.610	198.12 - 202.13	0.59	-	0.59	-
6-1906097-2	61.380 - 62.620	201.37 - 205.44	0.59	-	0.59	-
6-1906097-3	62.370 - 63.630	204.62 - 208.75	0.59	-	0.59	-
6-1906097-4	63.360 - 64.640	207.87 - 212.07	0.6	-	0.6	-
6-1906097-5	64.350 - 65.650	211.12 - 215.38	0.6	-	0.6	-
6-1906097-6	65.340 - 66.660	214.37 - 218.70	0.6	-	0.6	-
6-1906097-7	66.330 - 67.670	217.61 - 222.01	0.6	-	0.6	-
6-1906097-8	67.320 - 68.680	220.86 - 225.32	0.6	-	0.6	-
6-1906097-9	68.310 - 69.690	224.11 - 228.64	0.6	-	0.6	-
7-1906097-0	69.300 - 70.700	227.36 - 231.95	0.61	-	0.61	-
7-1906097-1	70.290 - 71.710	230.61 - 235.26	0.61	-	0.61	-
7-1906097-2	71.280 - 72.720	233.85 - 238.58	0.61	-	0.61	-
7-1906097-3	72.270 - 73.730	237.10 - 241.89	0.61	-	0.61	-
7-1906097-4	73.260 - 74.740	240.35 - 245.20	0.61	-	0.61	-
7-1906097-5	74.250 - 75.750	243.60 - 248.52	0.61	-	0.61	-
7-1906097-6	75.240 - 76.760	246.85 - 251.83	0.61	-	0.61	-
7-1906097-7	76.230 - 77.770	250.09 - 255.15	0.62	-	0.62	-
7-1906097-8	77.220 - 78.780	253.34 - 258.46	0.62	-	0.62	-
7-1906097-9	78.210 - 79.790	256.59 - 261.77	0.62	-	0.62	-
8-1906097-0	79.200 - 80.800	259.84 - 265.09	0.62	-	0.62	-

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS. IT IS NOT TO BE DISCLOSED TO ANY OTHERS WITHOUT THE WRITTEN AUTHORIZATION OF TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA

LOC
CE
DIST
16

A	Rev Per EC#	RELEASE	7/9/2008	-	JD				
P	LTR	REVISION RECORD	DATE	DIN	APVD				

DIMENSIONS:
meters

TOLERANCES UNLESS OTHERWISE SPECIFIED:

9	PLC	±	-
1	PLC	±	-
2	PLC	±	-
3	PLC	±	-
4	PLC	±	-

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
CHK	Jeremy Duncan	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	Jeremy Duncan				
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1906097
SHEET	3 of 4	REV	A		

D

C

B

A

Label 1

Per specification 107-1645-1




Trace # - Bar Code
 Trace # - Human Readable
 Part Number
 Country of Origin

This label is used on all lengths on this drawing.

Label 2

Per specification 107-1645-1



Trace # - Bar Code
 Trace # - Human Readable
 Part Number
 Country of Origin

This label is used on all lengths on this drawing.

THIS DRAWING IS A CONTROLLED DOCUMENT.

THIS INFORMATION IS CONFIDENTIAL AND PROPRIETARY TO TYCO ELECTRONICS CORPORATION. IT IS THE PROPERTY OF TYCO ELECTRONICS CORPORATION AND IS NOT TO BE DISCLOSED TO ANY OTHER PERSONS OR ORGANIZATIONS WITHOUT WRITTEN AUTHORIZATION FROM TYCO ELECTRONICS CORPORATION, HARRISBURG, PENNSYLVANIA.

LOC
 CE
 DIST
 16

A	Rev Per	EC#	RELEASE	7/9/2008	-	JD	
P	LTR		REVISION RECORD	DATE	DIN	APVD	

DIMENSIONS: meters	TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC	± .
1 PLC	± .
2 PLC	± .
3 PLC	± .
4 PLC	± .

Restricted To:

DIN	Cable Assy Configurator	MATERIAL	-	HEAT TREAT	-
CHK	Jeremy Duncan	Tyco Electronics, Inc. Harrisburg, PA 17105-3608			
APVD	Jeremy Duncan				
NAME	FO C/A - 2 fiber, XG - 50/125, OFNR (Riser) jacket, LC-Duplex Secure to LC-Duplex				
SCALE	NTS	SIZE	A2	DRAWING NO	C- 1906097
SHEET	4 of 4	REV	A		

D
 C
 B
 A