


HC-B 10-TFL-72/O1M25S

Order No.: 1604763

<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1604763>

HEAVYCON sleeve housing B10, for single locking latch, height 72 mm, with support 1x M25, lateral conductor exit

Commercial data

| | |
|--------------------------|---|
| GTIN (EAN) |  4 017918 882556 |
| sales group | D002 |
| Pack | 10 pcs. |
| Customs tariff | 85389099 |
| Catalog page information | Page 482 (PC-2009) |

Product notes

WEEE/RoHS-compliant since:
03/01/2006



<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data

| | |
|--------|--|
| Note | For contact inserts HC-B10, BB18, DD42, M, K8/24 |
| Design | B10 |
| Height | 72 mm |
| Width | 43 mm |
| Length | 73 mm |

| | |
|---------------------------------|--------------------------|
| Housing type | Sleeve housings |
| Locking type | for single locking latch |
| Cable exit | Lateral |
| Type of the screw connection | 1x M25 |
| Wrench size, union nut | 25 mm |
| External cable diameter | 9 mm ... 18 mm |
| Degree of protection | IP65 |
| Ambient temperature (operation) | -40 °C ... 125 °C |
| Housing material | Aluminum, die-cast |
| Housing surface material | Powder-coated, gray |

Certificates / Approvals




Certification

GOST

Diagrams/Drawings

Dimensioned drawing

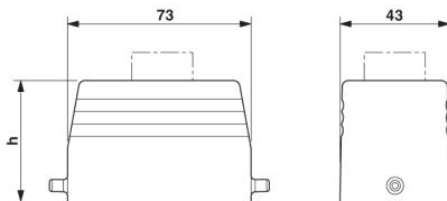

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;