


THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED, REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS, INC.

NOTES:

- SPECIFICATION:  
 JACKET: SILICONE. MULTI-LAYER, 1ST LAYER WHITE; 2ND LAYER "COLOR" OD:  $.106 \pm .008$  (2.7 mm)  
 CONDUCTOR: BARE COPPER, STRANDING 130 x 0.07 mm = 0.50 mm<sup>2</sup>, 20 AWG.
- RATING:  
 VOLTAGE: 1,000 V CAT IV PER IEC 61010-031  
 CURRENT: 10 A MAX.  
 TEMPERATURE: -60° C TO +180° C.
- AVAILABLE IN 3 STANDARD LENGTHS AND 6 COLORS - SEE MODEL NUMBER BELOW.

REVISIONS			
REV.	DESCRIPTIONS	DATE	APPROVED
-	CLASS A RELEASED	7/11/99	
A	UPDATED FORMAT w/ CAGE CODE	4/18/04	

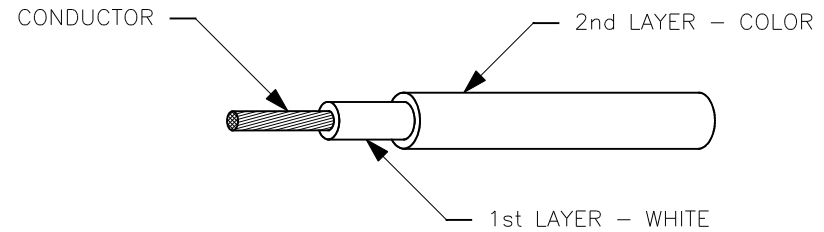

**MODEL NUMBER**

**CT2884-#-XXX**

COLOR: 0 - BLACK  
 2 - RED  
 4 - YELLOW  
 5 - GREEN  
 6 - BLUE  
 9 - WHITE

LENGTH: 10 - 10 m PACKAGE  
 50 - 50 m SPOOL  
 100 - 100 m SPOOL

THIRD ANGLE PROJECTION		UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS    DECIMALS ± 1/32        .XX ± .02 .XXX ± .005 DO NOT SCALE DRAWING	CONTRACT NO.		<b>Cal Test Electronics</b> 22820 Savi Ranch Parkway Yorba Linda, CA 92887-4610	
			APPROVALS	DATE	TITLE	
MATERIAL		DRAWN	WDH	7/11/99		<b>WIRE, TEST LEAD, SILICONE JACKET,          0.05 mm<sup>2</sup>, 20 AWG, 10 A</b>
FINISH		CHECKED			SIZE	REV.
NEXT ASSY	USED ON	ENGR.			A	A
APPLICATION		DESIGN ACTIVITY			CAGE CODE	DWG. NO.
					A	43F45
					P288400	
					SCALE	SHEET
					NONE	1 OF 1